


TYPE Q-1/Q-2

MISCELLANEOUS FILM CAPACITOR

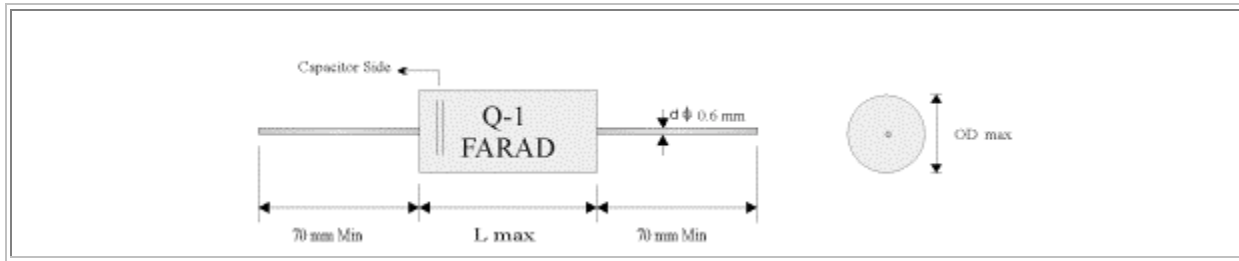


APPLICATION

Spark Killer.
Noise, click suppressor.

FEATURES

- *RC compound construction.
- *Small size and light weight.
- *Plastic can with epoxy resin filled.

TYPE	VDC	CAPACITANCE	RESISTANCE	DIMENSION	
		Mfd	Ohm	L	D
Q-1	350V	0.13	$470 \pm 30\%$	26	12.5
Q-2	350V	0.3	$150 \pm 30\%$	36	14.0

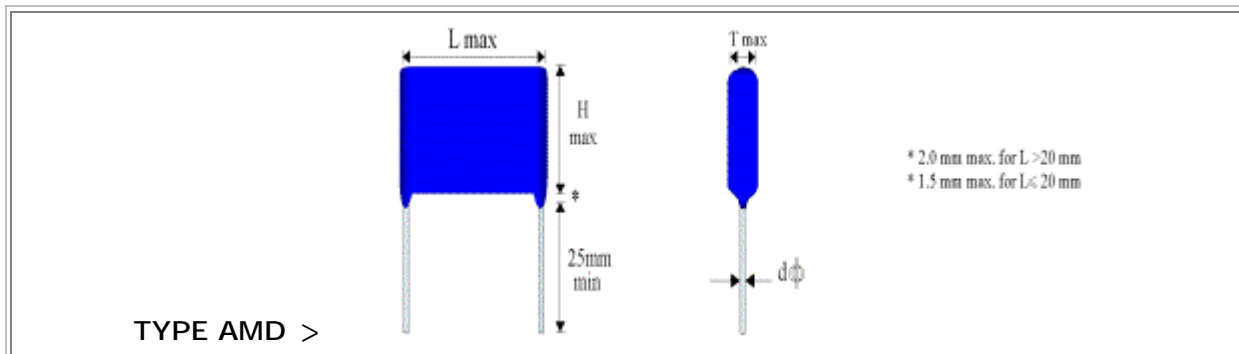

APPLICATION

Timing circuit.
Resonating equipment.
Testing equipment.
Voltage rating DC 100V.
Capacitance range 0.1 to 6.8 Mfd.

FEATURES

- *Dry metallized film construction.
- *Flat temperature coefficient up to 85.
- *Stable electrical characteristics and high reliability.

VARIOUS KINDS OF FILM CAPACITORS AVAILABLE UPON CUSTOMER'S REQUEST