

Standard Chip Resistors

Type: CRS

Sizes: 0504, 0603, 0805, 1206

Features:


- Chip Resistors in Thickfilm
- Resistance element glass-passivated
- Contact areas Nickel-barrier / matte tin
- RF-versions untrimmed
- Resistance values up to 500 MΩ
- Working voltage up to 600 Volts
- Suitable for high vacuum applications – no organics



Dimensions:

Size	L	B	D	C
0504	1.25 ^{+0.15/-0.05}	1.0 ^{+0.15/-0.05}	0.3 ^{+0.15/-0.05}	0.2 ^{+0.2/-0.1}
0603	1.5 ^{+0.15/-0.05}	0.8 ^{+0.15/-0.05}	0.4 ^{+0.15/-0.05}	0.2 ^{+0.2/-0.1}
0805	2.0 ^{+0.15/-0.05}	1.25 ^{+0.15/-0.05}	0.4 ^{+0.15/-0.05}	0.3 ^{+0.2/-0.1}
1206	3.2 ^{+0.15/-0.05}	1.5 ^{+0.2/-0.05}	0.4 ^{+0.15/-0.05}	0.3 ^{+0.2/-0.1}

L = Length, B = Width, D = Thickness, C = Width of wrap around (in mm)

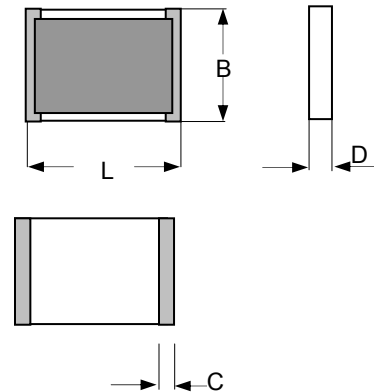

Packaging:

Bulk in plastic bags – minimum quantity 100 pieces per value

Blistertape acc. to IEC 60286-3 – minimum 1000 pieces per value

Reel diameter 180 mm or 330 mm

Ordering Data:

Type – value – tolerance – TCR – packaging

Example: CRS 0805 100K ± 1% - TCR 100 Tape 180 mm

Untrimmed parts are indicated by the extension “NA” in the order code:

Type – value – tolerance – NA – TCR - packaging

Example: CRS 0805 100K ± 1% NA TCR 100 Tape 180 mm

If no requirements for TCR and taping are given the standard value (highest value in table) will be supplied and packaging is bulk.

Part Number: (Sample CRS1206-100MD-FR is CRS1206 100MΩ/±1%/100ppm/Reel)

CRS <size> - Resistance and TC (if applicable) - Tolerance and Pack



BREL International Components, Inc.
2001 Whitfield Park Ave.
Sarasota, Florida 34243



Phone: 941-758-7500
Sales: 800-237-4564
Fax: 941-758-7556
Email: sales@brelintl.com
Website: www.brelintl.com
Issue: December-2007
Page: 1 of 3

Standard Chip Resistors

Type: **CRS**

Sizes: **0504, 0603, 0805, 1206**

Technical data – depending on size:

Size	0504	0603	0805	1206
Power rating P_{70} (mW) ($P_{155} = 0$ mW)	100	100	125	250
Working voltage U_{eff} (V) trimmed untripped (Tol. $\geq 5\%$)	50 150	75 200	100 300	200 600

Ranges / Tolerances / TCR ¹⁾ / VCR				
0R1 – <1R	–	10/20% TC250	5/10/20% TC250	5/10/20% TC250
1R – <10R	5/10/20% TC100/250	5/10/20% TC100/250	2/10/20% TC100/250	2/10/20% TC100/250
10R – <100R	2/5/10% TC100	1/2/5/10% TC100	1/2/5/10% TC50/100	1/2/5/10% TC50/100
100R – 1M	1/2/5/10% TC50/100	1/2/5/10% TC50/100	0.5/.../10% TC50/100	0.5/.../10% TC50/100
>1M – 10M	1/2/5/10% TC50/100	1/2/5/10% TC50/100	0.5/.../10% TC50/100	0.5/.../10% TC50/100
>10M – 100M	2/5/10/20% TC100/250	1/.../20% TC50/100	0.5/.../20% TC50/100	0.5/.../20% TC50/100
>100M – 500M	–	5/.../20% TC100/250	2/.../20% TC100/250	2/.../20% TC100/250

¹⁾ TC 50: Temperature range + 25°C...+ 125°C

Zero-Ohm-Jumper: < 50 mOhm. TCR max. + 4000

Sizes 0805/1206 in range 1M – 100 M as special product also with TCR 25 available.



BREL International Components, Inc.
 2001 Whitfield Park Ave.
 Sarasota, Florida 34243



Phone: 941-758-7500
 Sales: 800-237-4564
 Fax: 941-758-7556
 Email: sales@brelintl.com
 Website: www.brelintl.com
 Issue: December-2007
 Page: 2 of 3

Standard Chip Resistors

Type: CRS

Sizes: 0504, 0603, 0805, 1206

Technical Data - General:

Temperature range	-55°C ... +155°C
Climatic category acc. to DIN EN 60068-1	55/155/56
Solderability acc DIN EN 60068-2-58 (lead free and lead-containing)	250°C, 3s
Max. soldering temperature acc. DIN EN 60068-2-58	260°C, 10s

Long term stability	10R - 100M	<10R / >100M
Storage 125°C/1000h	<0.5%	<1%
Storage 155°C/1000h	<1%	<2%
Load P ₇₀ /70°C/1000h	<0.5%	<1%
Short term overload	<0.25%	<0.5%
Damp heat (56d/40°C/96%)	<0.5%	<1%

Data not specified according CECC 40401-802

Issue 02-2007



BREL International Components, Inc.
 2001 Whitfield Park Ave.
 Sarasota, Florida 34243



Phone: 941-758-7500
 Sales: 800-237-4564
 Fax: 941-758-7556
 Email: sales@brelintl.com
 Website: www.brelintl.com
 Issue: December-2007
 Page: 3 of 3