


TYPE
EOL

DIPPED POLYESTER CAPACITOR

INDUCTIVE, RADIAL LEAD WELDED
CONSTRUCTION, EPOXY COATED

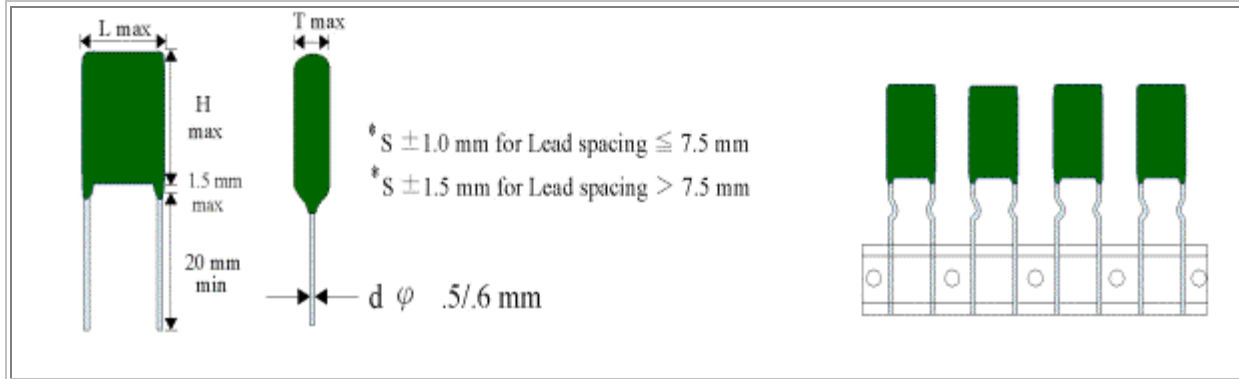

VDC	50/100 VDC			
Mfd	L	T	H	S
0.0010	5.8	3.3	10.0	3.3
0.0012	5.8	3.3	10.0	3.5
0.0015	5.8	3.3	10.0	3.5
0.0018	5.8	3.3	10.0	3.5
0.0022	5.8	3.3	10.0	3.5
0.0027	5.8	3.3	10.0	3.5
0.0033	6.0	3.3	10.0	3.5
0.0039	6.0	3.3	10.2	3.5
0.0047	6.5	3.6	10.2	3.5
0.0056	6.5	3.6	10.2	3.5
0.0068	6.5	4.0	10.2	3.5
0.0082	6.5	4.0	10.2	3.5
0.010	6.5	4.0	12.0	3.5
0.012	6.5	3.4	12.0	3.5
0.015	6.5	3.6	12.0	4.0
0.018	6.8	3.6	12.0	4.0

APPLICATION

Most suitable for PCB of consumer and industrial electronics at economic price

GENERAL SPECIFICATION

1. OPERATING

TEMPERATURE:

-40°CJ to 85°CJ

2. VOLTAGE RANGE:

50 and 100 VDC.

3. CAPACITANCE RANGE:

0.001 to 0.47 Mfd.

4. DIELECTRIC STRENGTH:

250% of rated voltage for

0.022	7.2	4.0	12.4	5.0
0.027	7.2	4.0	12.4	5.0
0.033	8.0	4.5	12.7	5.0
0.039	8.0	5.0	13.0	6.0
0.047	8.7	5.0	13.2	6.0
.056	8.7	5.0	13.2	6.0
0.068	9.6	5.5	13.7	6.0
0.082	10.5	6.0	13.7	7.5
0.100	11.0	6.5	14.4	7.5
0.120	12.2	7.4	14.7	7.5
0.150	10.7	7.5	19.0	7.5
0.180	11.2	7.5	19.3	8.5
0.220	12.0	7.4	19.5	8.5
0.270	13.5	8.0	19.5	10.0
0.330	14.5	8.0	19.9	10.0
0.390	16.0	9.0	20.5	10.0
0.470	17.8	9.7	22.0	10.0

5 sec.

5. CAPACITANCE

TOLERANCE:

±5%, ±10% and ±20%.

6. INSULATION

RESISTANCE:

50,000 Meg. Ohm min. at 25°C

7. DISSIPATION FACTOR:

.75% max. at 1KHz 25°C



BREL International Components, Inc.
1621 West University Parkway
Sarasota, Florida 34243



Phone 941-355-9791
Sales: 800-237-4564
Fax: 941-355-1530
E-Mail: sales@brelintl.com
Website: www.brelintl.com
Issue: January - 2001