SMD Low Voltage Class I — Non Magnetic SMD

0805A391JAFB

BREL International

DESCRIPTION

0805 NPO 390pF ±5% 50V AgPdPt Tape



RoHS compliant

FEATURES

- Precious Metal Electrode (PME)
- Ultra stable temperature compensating class I ceramic
- Tested in accordance to CECC 32100 and AEC-Q200
- Ag/Pd/Pt non magnetic termination suitable for soldering or epoxy bonding
- Non magnetic construction : precious metal inner electrodes
- Magnetic properties tested

ELECTRICAL PARAMETERS

CAPACITANCE :
390 pF ±5% at 1 MHz / 1 Vrms

OPERATING TEMPERATURE :
-55°C, +125°C

TEMPERATURE COEFFICIENT :
±30 ppm/°C (NPO, EIA)

DISSIPATION FACTOR :
≤ 0.1 % at 1 MHz and 1 Vrms

INSULATION RESISTANCE (IR) :
≥ 100 GΩ at 25°C
≥ 10 GΩ at +125°C

DIELECTRIC STRENGTH TEST :
2.5 × Ur / 5 s = 125 V, 50 mA max charging current

MARKING :
Unmarked

ORDERING INFORMATION

0805	A	391	J	A	F	B		-
SIZE	DIELECTRIC	CAPACITANCE	TOLERANCE	VOLTAGE	TERMINATION	PACKAGING	ELECTRODE	SCREENING
0805	NPO	390pF	+/- 5%	50 V	AgPdPt	Tape	Precious Metal Electrode (PME)	Standard

DIMENSIONS IN MILLIMETERS

	0805
Length (L)	2.00 ± 0.20
Width (W)	1.25 ± 0.20
Thickness (T)	0.80 - 1.40
Termination (P) min	0.15
Termination (P) max	0.60

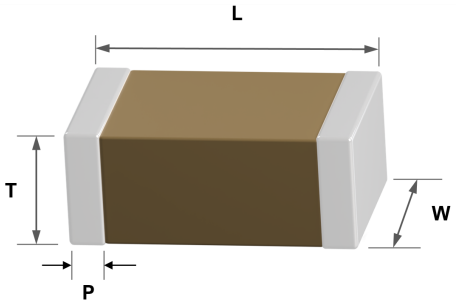

RECOMMENDED FOOTPRINT

	IN MM
A	3.20
B	1.20
C	0.90
D	1.00
E	4.00
F	1.50



BREL International
2001 Whitfield Park Ave
Sarasota, FL 34243 USA

STANDARD PACKAGING

	7" (178 MM)
Carrier tape	Plastic tape · 12 mm
Pieces per 7" reel	3000
Pieces per 13" reel	10000
Ordered packaging	7" reel — 3000 pcs / reel

REVISION HISTORY

REV	DATE	REDACTED BY	APPROVED BY	MODIFICATIONS
A	17/09/2026	PEF	ALU	Creation

This document is the property of Brel International, communication and use are prohibited except with written permission.

BREL International
2001 Whitfield Paark Ave
Sarasota, FL 34243 USA